


LUBING *A Tradition of Innovation.*

Optima E-Flush Regulator

Full control with a half turn

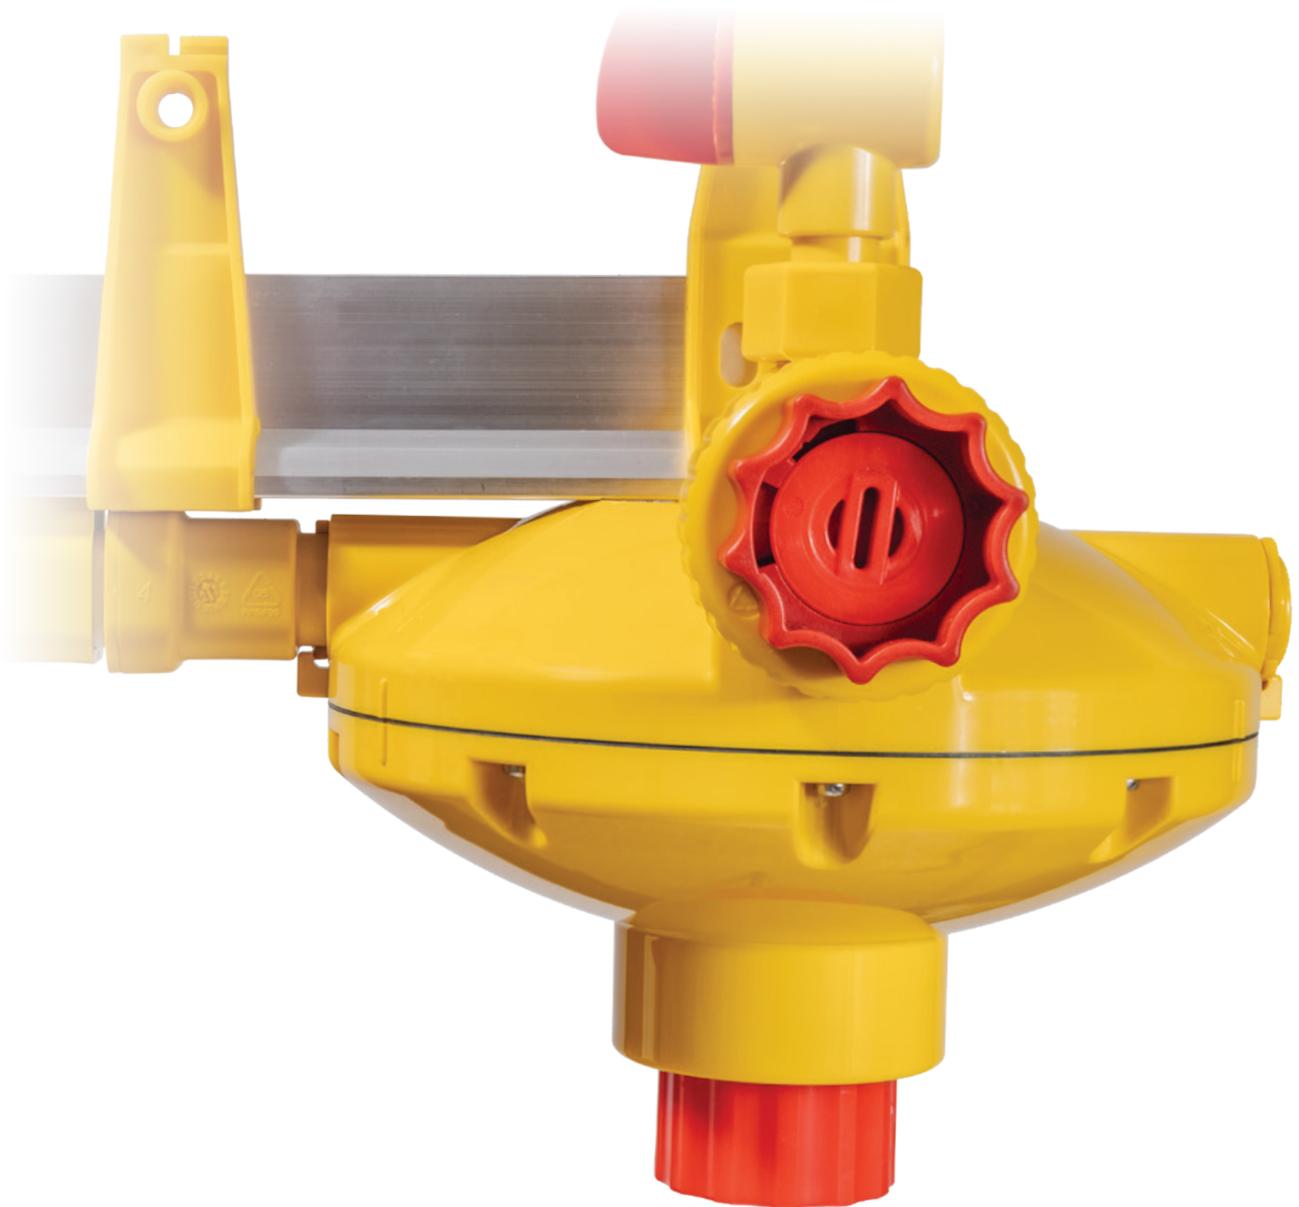

LUBING

At a Glance.

More Efficient



Optima E-Flush can be manually switched to flush mode with a simple half turn of the flush knob.

More Control



Optima E-Flush offers future flexibility for implementing automatic flushing with the addition of solenoids and a controller.

Lower Mortality and Improved Feed Conversion



Potential for improved feed conversion, lower mortality and reduction in biofilm formation with less work when using the automatic flush capability.

Solenoid

The optional screw-in solenoid allows automatic flushing of the drinker line when used with the LCW Touch Control. Manual flushing is also still possible when using the solenoid.



Optional solenoid



E-Flush regulator without solenoid



E-Flush regulator with solenoid

Controller

With the LUBING LCW Touch Control and solenoids you can program your system to automatically flush on a desired schedule, or with a push of a button. With the available temperature sensor it is also possible to flush when water temperature exceeds a desired max temperature.



Simple Drop-In Solution

Optima E-Flush regulator is a drop-in replacement for the Optima regulator and can be used with all existing accessories.



Ideal For All Poultry Production

The Optima E-Flush is an ideal solution for all types of poultry production:

- Broiler
- Breeder
- Turkey
- Layer

Simplify your production with the Optima E-Flush Half Turn regulator, and maximize your efficiencies with the automatic features of the solenoid and LCW Touch Controller.

Technical details subject to change: 04 / 2022

LUBING

LUBING Systems, L.P. • 135 Corporate Drive, SW • Cleveland, TN 37311 • USA • tel 423 709.1000 • fax 423 709.1001 • info@lubingusa.com • www.lubingusa.com