

LUBING

EASYLINE 2.0 DRINKER

TWIN NIPPLE TURKEY DRINKING SYSTEM



RELENTLESS QUALITY. EXCEPTIONAL SERVICE.

EASYLINE2.0 CUP BROOD/HEN FINISHING


The EasyLine2.0 cup with stainless steel insert for brood and hen finishing is designed to deliver the proper amount of water to the birds from day one through every stage of their life. Water is delivered into the cup by means of the pendulum. The size of the oval cup provides easy access to the young poults and is designed to keep the litter dry during grow-out.



EASYLINE2.0 CUP TOM FINISHING

The EasyLine2.0 cup for tom finishing incorporates a fixed stainless steel insert and is designed to handle the aggressive behavior of larger birds. An optimal supply of water is provided to the cup through the pendulum.

The design of this cup is larger in diameter to help reduce the possibility of water spillage and improve litter conditions throughout the building.




4001-4 STAINLESS STEEL NIPPLES

The 4001-4 nipple is manufactured from specifically selected chemical resistant stainless steel, and engineered to be a long lasting nipple while optimizing bird growth.



EASYLINE 2.0 PENDULUM DESIGN

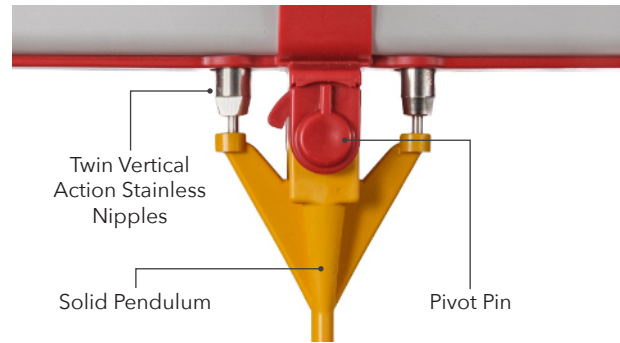

At the heart of the system is the new pendulum which triggers the nipples vertically allowing water to flow along the outside of the pendulum into the cup. When the drinking system is at the proper height, the feathers on the neck of the birds keep the edge of the cups clean.

Key features and benefits

- Large diameter pivot pin increases surface area for reduced wear and requires no tools for assembly
- Vertical nipple triggering eliminates sliding friction for minimal component wear and a long product life
- Solid pendulum with outer surface water flow allows for easy inspection and cleaning

Recommended number of birds/nipple

Brooding:	30-40
Tom finishing:	approx. 20
Hen finishing:	25-30

Versions of 10' sections

Brooding or hen finishing:	3, 4, 5, and 6 drinkers / section
Tom finishing:	3, 4, and 5 drinkers / section

Nipple	Water Column	Side Flow (mL/min)	Vertical Flow (mL/min)
4001-4	8"	NA	150

OPTIMA E-FLUSH PRESSURE REGULATOR

Our Optima E-Flush pressure regulator has built-in flushing capabilities with a simple half twist of a knob. Water pressure is easily adjusted with the regulator knob located underneath the unit. The clear flexible standpipe with float ball offers accurate and precise water pressure adjustment.



SOLENOID

The optional screw-in solenoid allows automatic flushing of the drinker line when used with the LCW Touch Control. Manual flushing is also still possible when using the solenoid.



Optional solenoid

FLUSH BREATHER UNIT

The flush breather unit incorporates a clear flexible standpipe and float ball for establishing an accurate water pressure adjustment, and also includes hose attachments for automatic flushing and cleaning.

